

Safety Device according to DIN EN ISO 5175-1
with Hose Coupling

Safety device: NKSG

Type NKSG for in-hose or torch side connection

The safety device NKSG according to DIN EN ISO 5175-1:

- avoids dangerous gas mixtures by a gas non-return valve (NV)
- stops flashback through flame arrestor (FA)
- safe interruption of gas flow by automatic gas cut-off when disconnecting
- a dust filter protects the gas non-return valve against contamination
- every safety device is 100% tested
- all metal components in brass 2.0401 / spring 1.4310

Safety elements of the IBEDA safety device NKSG:

- NV Gas non-return valve
- FA Flame arrestor
- SV Shut-off valve

Additional features:

- DF Dust filter

Maintenance:

The safety devices are to be tested by a qualified and authorised person at regular intervals according to country specific regulations. The safety device is to be tested for gas tightness, gas flow and gas return at least once a year.

Couplings are wearing parts and have to be tested by a qualified and authorised person (at least once a year). The tests have to be performed when the couplings are connected as well as disconnected.

Leakage tests are to be performed with inert gas or air (free from oil and grease) or the operating gas.

We would be pleased to offer you the flashback arrestor testing unit model PVGD.

It is not allowed to open the safety devices.



Technical Data:

Gas types:	Acetylene (A)	Hydrogen (H) Industrial gas (C)	Natural Gas (Methane) (M) Propane (P)	Oxygen (O)
Working pressure:	0,15 MPa 1,5 bar	0,40 MPa 4,0 bar	0,40 MPa 4,0 bar	1,5 MPa ¹⁾ (2,0 MPa) 15 bar (20 bar)
Cracking pressure:	50 to 70 mbar position-independent			
Gas temperature:	-20°C up to +70°C (Oxygen -20°C up to +60°C)			
Ambient temperature:	-20°C up to +70°C			
Threads: EN 560 ISO / TR 28821	G3/8LH M16x1,5LH UNF5/8LH UNF9/16LH		G1/4RH G3/8RH M16x1,5RH UNF5/8RH UNF9/16RH	
Outlet:	IBEDA-coupling series N			
Measure and weight:	diameter:	length:	weight:	
	20,0 mm	78,0 mm	121,0 g	
Applications:				
Process:	welding	cutting	heating	
	up to 30 mm	up to 200 mm	up to 30 mm	
Compatible with:	Coupling pin N1, N2 and N4			

Other materials, surface finishing, gas types and additional connections available on request.

The flashback arrestor meets the test criteria of the Australian standard AS4603:1999

¹⁾ with plastic filter

**Safety Device according to DIN EN ISO 5175-1
with Hose Coupling**

Type: NKSG

Flow rates [air]:

pv = Primary pressure
ph = Secondary pressure
 Δp = Primary pressure minus Secondary pressure


Conversion Factors:

0,1 MPa = 1 bar = 100 kpa = 14,504 psi
1 m³/h = 35,31 cu ft/h

	A	H	P	M	M	O	E	L
QG ▶	C ₂ H ₂	H ₂	C ₃ H ₈	CH ₄ +C	CH ₄	O ₂	C ₂ H ₄	C ₃ H ₆
F	1,2	3,8*	0,90	1,25	1,4	0,95	1,02	0,92

* Conversion factor 2.5 for devices comprising a flame arrester
The conversion factor for free flow is 3.8.
(Reference: BAM report 220, D. Lietze)

Example:

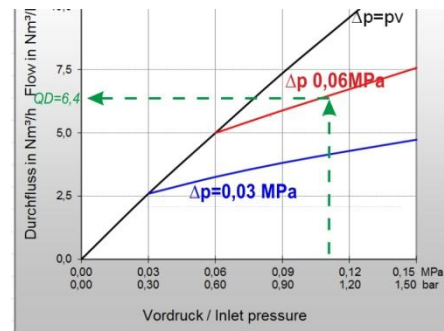

$QG = QD \times F$

QG ▶ A = 6,4 x 1,2 = 7,68 m³/h C₂H₂

QG = flow / gas type
F = conversion factor
QD = flow / air

Certification / Technical Standards / Rules

BAM Federal Institute for Materials Research and Testing, UL Underwriters Laboratories Inc., DGUV employer's liability insurance association rules and regulations, DVS German Association for Welding, Cutting and Allied Processes, TRBS German Technical rules for operation safety.

Standards/ Approvals

Company certified according to ISO 9001:2015 and ISO 14001:2015, CE-marking according to: Pressure Equipment Directive 2014/68/EU

(Subject to change without notice)

